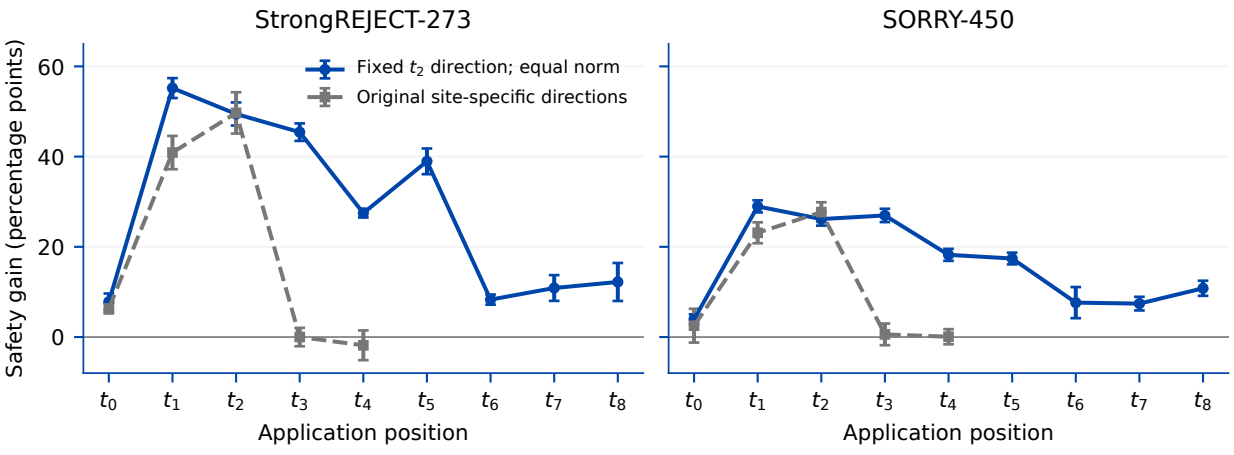

StrongREJECT-273
SORRY-450
Fixed $t_2$ direction; equal norm
Original site-specific directions
Safety gain (percentage points)
60
40
20
0
$t_0$ $t_1$ $t_2$ $t_3$ $t_4$ $t_5$ $t_6$ $t_7$ $t_8$
Application position